USER GUIDE

MSI CENTER
for Business & Productivity
NOTEBOOK

Content

Introduction 5

Login and Register 5

Create an Account 5

Product Registration 6

Get Started 8

Optimization 9

User Scenario 9

How to Use User Scenario 9

How to Use User Scenario with Keyboard FN keys 10

Application Optimizer 11

Interface Overview 11

Add and Edit the SW List 12

How to Use Application Optimizer 13

Noise Cancel 16

How to Make Noise Cancel Take Effect 16

Duet Display 18

How to use Screen Capture 18

How to use iOS Screen Mirroring 21

General Settings 22

Interface Overview 22

System Analysis 23

System Info 23

Live Update 25

Microsoft APP 26

Support **27**
System Diagnosis 27
Battery Master 27
Battery Calibration 28
System Checker 31
Backup 33
Create a Recovery USB Flash Disk 33
Create a Recovery ISO File 35
Recovering the System 36
System Restore 39
Interface Overview 39
How to restore the system to a selected Restore Point 40
How to create your own Restore Point 41
System Restore function provided by Windows 43
Setting **44**

Copyright and Trademarks Notice

Copyright © Micro-Star Int'l Co., Ltd. All rights reserved. The MSI logo used is a registered trademark of Micro-Star Int'l Co., Ltd. All other marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. MSI reserves the right to make changes to this document without prior notice.

Revision History

- Version: 1.0
- Date: 12, 2020

Introduction

MSI Center for Business & Productivity, the exclusive application created only for MSI's new Business and Productivity series -- Summit, Prestige, and Modern, delivers optimized productivity, performance, and efficiency to business and diverse users.

Be noted that MSI Center is only available for MSI Business and Productivity series with 11th Gen Intel® Core™ and 4th Gen AMD® Ryzen processors.

Login and Register

Before using MSI Center, it is recommended to create your own account and register your MSI product to get your full benefits from MSI Center at once.

Create an Account

1. Activate MSI Center, find [Home] at the left selection column.
2. Choose [Join MSI Member] to create an account, and then follow the on-screen instructions to apply a personal account and register your MSI product.

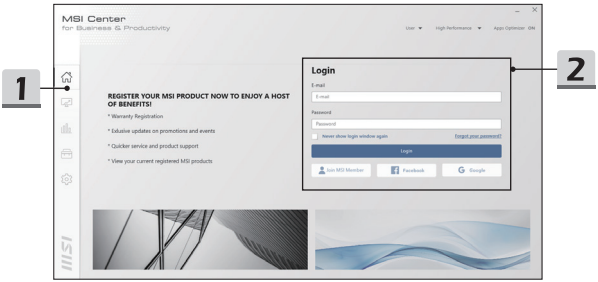

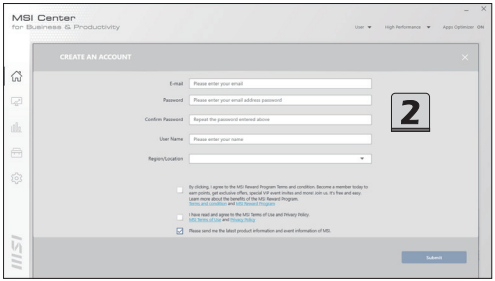

Product Registration

1. Once a personal account is created, you may start to register your products.
2. The notebook you are using will be detected by MSI Center automatically, follow the on-screen instructions to complete the registration.
3. To register MSI multi-media accessories which are connected to the notebook, click [Add New Product] and then follow the on-screen instructions to complete the registration.

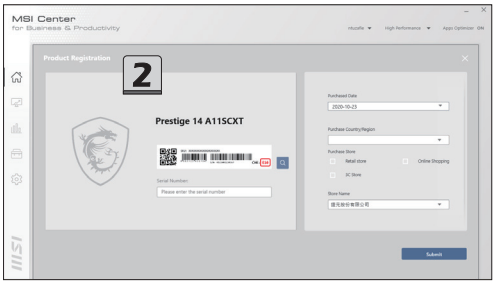

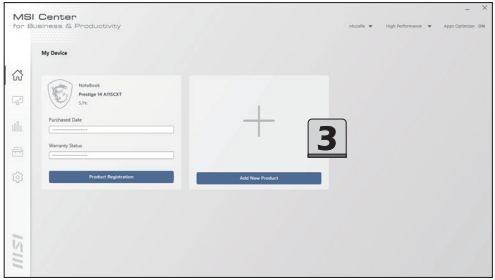
MSI Center
for Business & Productivity
My Device
Notebook
Prestige 14 A11SCXT
S/N:
Purchased Date
Warranty Status
Product Registration
Add New Product
3

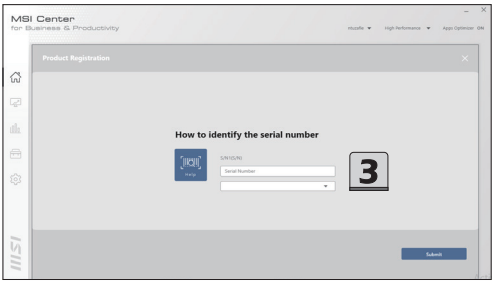
MSI Center
for Business & Productivity
Product Registration
How to identify the serial number
S/N(SN)
Serial Number
3
Submit

Get Started

Now, let's get familiar to MSI Center! Here comes an overall user interface shown below, you may read the brief introduction of this user interface before going any further.

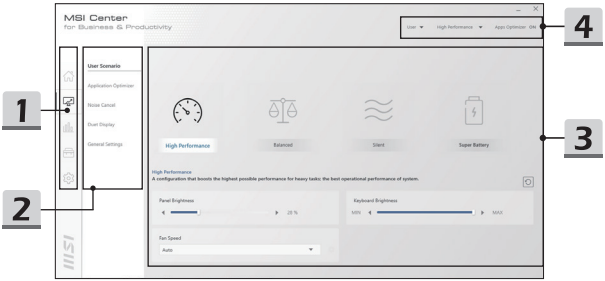

1. **Main Selection column**
   Find 5 main categories, Home, Optimization, System Analysis, Support, and Setting, at this column.
2. **Sub Selection column**
   Find advanced functions or fools of each main category.
3. **Operating area**
   Give further or detailed settings here for each function.
4. **Information Area**
   Find setting information here: Login status, current User Scenario selection, Application Optimizer status.

Optimization

Within **Optimization** category, there are 5 advanced functions included: User Scenario, Application Optimizer, Noise Cancel, Duet Display, and General Settings.

User Scenario

4 custom-made User Scenarios are available for users to choose in accordance with users' needs to increase the work efficiency.

How to Use User Scenario

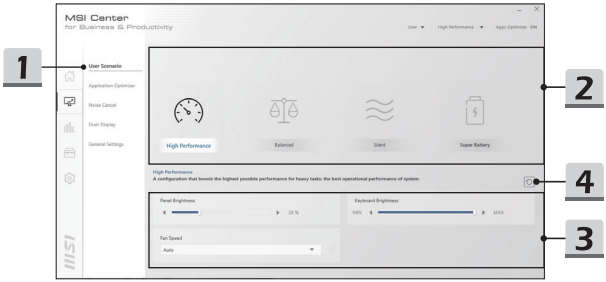

1. Go to MSI Center [Optimization > User Scenario]
2. Select a proper User Scenario according to your needs.
   - **High Performance**: A configuration that boosts the highest possible performance for heavy tasks, the best operational performance of system.
   - **Balanced**: A cozy, and the best system factory default settings that MSI recommended.
   - **Silent**: The quietest system, fan speed is limited to keep the noise level under the ambient noise.
   - **Super Battery**: The best battery life and the lowest possible power consumption for the basic needs.

3. Use the scrolling bar to re-adjust a required [Panel Brightness] and [Keyboard Brightness]. [Fan Speed] will be adjustable when [High Performance] is selected.
4. Click this button to reset the Panel and Keyboard Brightness to default settings.

How to Use User Scenario with Keyboard FN keys

* Optionally supported for selected models.

To use User Scenario with keyboard FN keys, simply press FN and F7 keys repeatedly to switch between each scenario, and you may read the selected scenario shown on the display. Refer to the User Guide for further information about Keyboard FN keys.

Application Optimizer

Application Optimizer allows users to allocate system resources manually to the specified App selected in accordance with users' needs, as long as the Apps are supported by Application Optimizer.

Interface Overview

Go to MSI Center [Optimization > Application Optimizer]

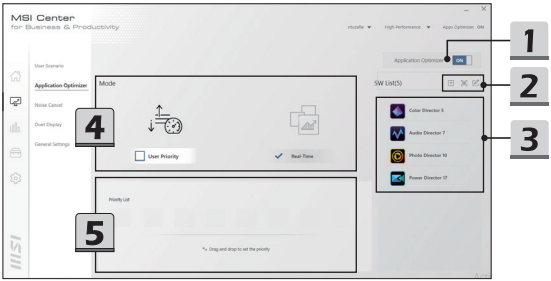

1. ON/OFF switch of Application Optimizer
2. Tools (from left to right)
   - Add : add a new Apps into SW List.
   - Refresh: refresh the SW list to get the latest list.
   - Edit: edit the SW List.
3. SW List: in addition to default Apps included, users may also add other Apps into this list.
4. Optimizer Mode
   - User Priority: the system resources will be allocated by users.
   - Real-Time: the system resources will be allocated automatically.
5. Priority List: those Apps dragged into Priority List from SW List are allocated better system performance.

Add and Edit the SW List

1. To add an App into SW List, move the mouse cursor to [Add] and click on it.
2. Find and select the executable file of a specified App.
3. Click [Open] to complete inserting the selected App into SW List.
4. To delete an App in SW List, move the mouse cursor to [Edit] and click on it.
5. Select the specified App, and then click the [trashcan] icon to delete.
6. Click [Delete] to delete the selected App or click [cancel] to continue.

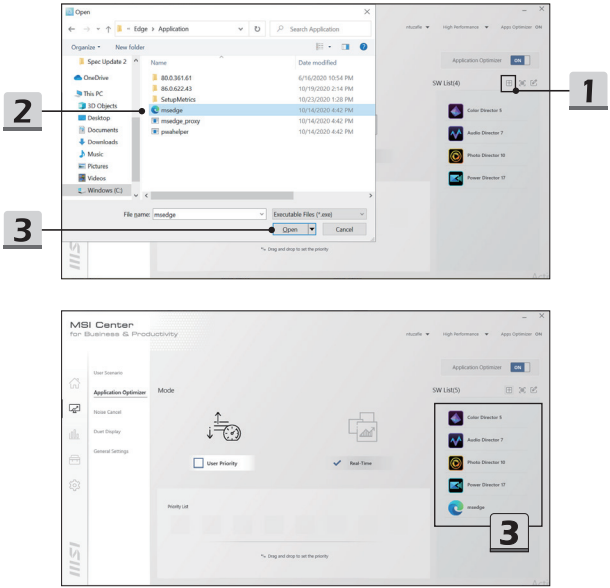

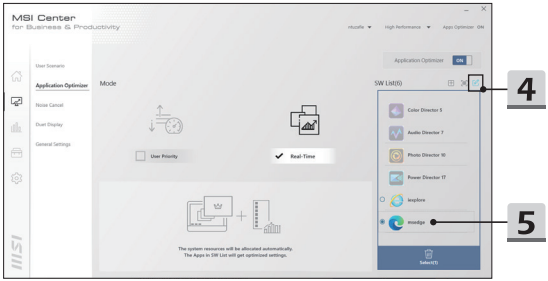

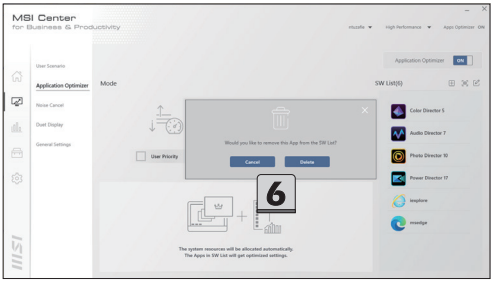

How to Use Application Optimizer

1. Before using Application Optimizer, make sure that the function SWITCH is set to [ON], and all the Apps shown in SW List are not activated at the background.
2. If [Real-Time] mode is selected, the system resources will be allocated automatically. The Apps in SW List will get optimized settings.

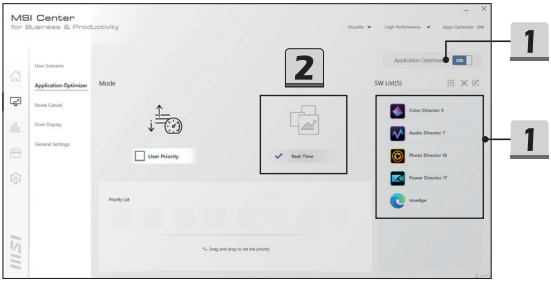

3. If [User Priority] mode is selected, users are allowed to drag a specified App from SW List into Priority List.
4. To drag an App, move the mouse cursor to the icon of the App. Left click on the icon and hold the mouse button. Drag and drop the App into the Priority List.
5. For those Apps listed in the Priority List, they will get optimized system resources.

7. To remove the Apps shown in the Priority List, move the mouse cursor to the icon of the App in the Priority List. Right click on the icon and hold the mouse button. Drag and drop the App back to the SW List.
8. Maximum 8 Apps are allowed to be selected into Priority List at one time. Follow the on-screen instructions to re-edit the Priority List.

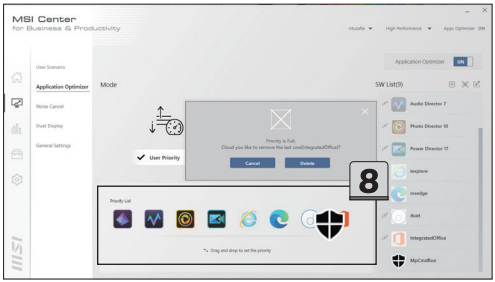

Noise Cancel

＊Optionally supported for selected models.

The AI-powered noise cancellation ais trained through deep neural network (DNN), the model is generated with more than 500 million data, simulate the way human brain works. When a sound is heard, the model automatically recognizes and separates the vocal sound from background noises. Hence, filtering out all the unwanted noise. This feature greatly imporves the users' communication experience.

How to Make Noise Cancel Take Effect

1. Activate Skype, and then go to Skype [Settings > Audio & Video].
2. Select Microphone (MSI Sound Tune) within the drop-down menu of Microphone option.
3. Select Speaker (MSI Sound Tune) within the drop-down menu of Speaker option.

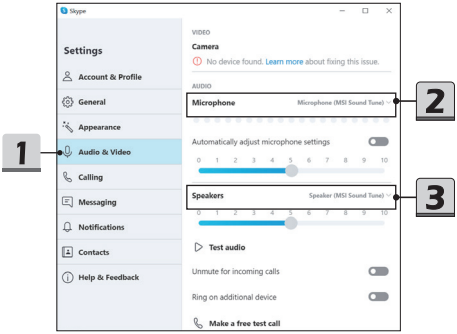

4. Activate MSI Center, go to [Optimization > Noise Cancel].
5. Make sure to set Speaker Noise Cancel and Microphone Noise Cancel to [ON].

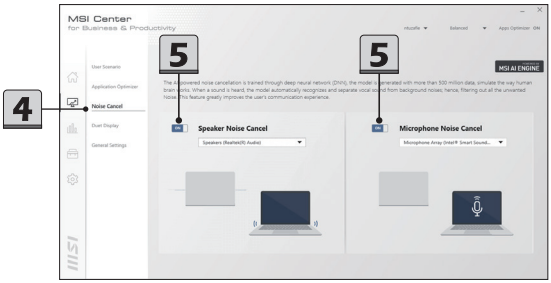

Duet Display

＊Optionally supported for selected models

With this function, Duet Display, you may extend the screen across multiple monitors or turn your iOS devices into a second display.

How to use Screen Capture

1. Connect a second display.
2. Go to Windows [Start > System > Display] and find Multiple displays option.
3. The system will detect automatically if there is a second monitor connected. Select [Extend] under Multiple displays option.
4. Go to MSI Center [Optimization > Duet Display]. To make a screen profile, move the mouse cursor to [New] and click on it.
5. Give a name to the New Profile.
6. To pick segments of the display for the new Profile, use mouse to drag and snip maximum 3 segments, and then click [Done] to finish.
7. A new profile added successfully.
8. Select and activate a profile under Screen Profile option by double clicking the profile.
9. Click [Yes] or [No] to decide switching between captured and projected display.

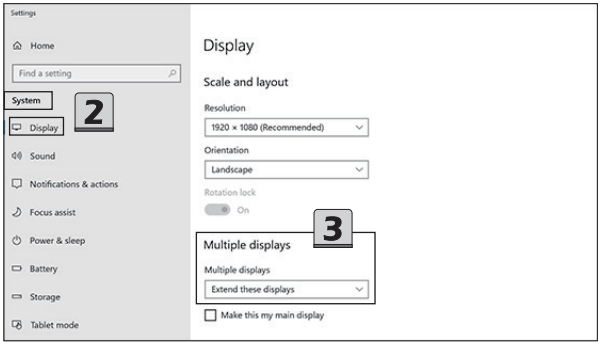

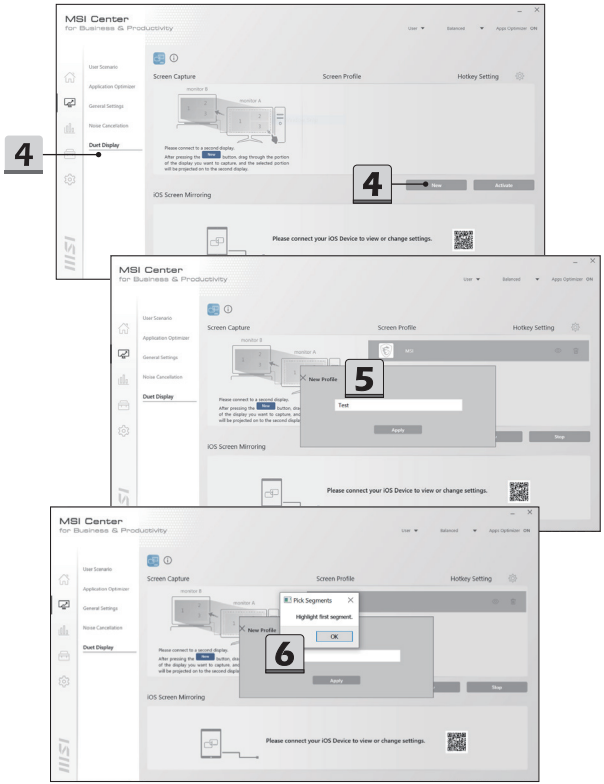
MSI Center
for Business & Productivity
User Scenario
Application Optimizer
General Settings
Noise Cancellation
Duet Display
Screen Capture
Screen Profile
Hotkey Setting
iOS Screen Mirroring
Please connect your iOS Device to view or change settings.
4
New
Activate
5
New Profile
Test
Apply
Skip
6
Pick Segments
Highlight first segment.
OK

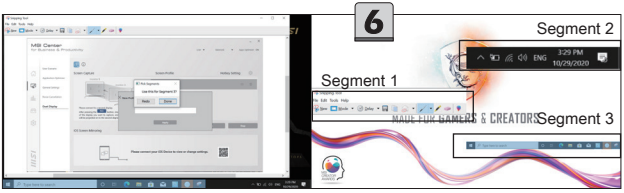
6
Segment 2
Segment 1
Segment 3
MADE FOR GAMERS & CREATORS
ENG
3:29 PM
10/29/2020

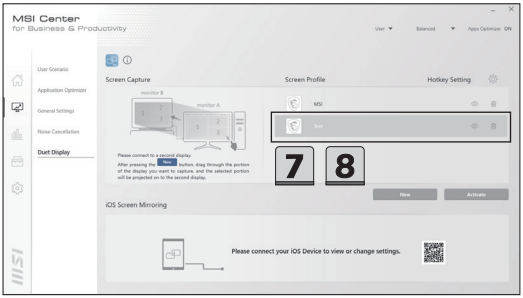
MSI Center
for Business & Productivity
User
Balanced
Apps Optimizer ON
User Scenario
Application Optimizer
General Settings
Noise Cancellation
Duet Display
Screen Capture
Screen Profile
Hotkey Setting
monitor B
monitor A
MSI
Please connect to a second display.
After pressing the New button, drag through the portion of the display you want to capture, and the selected portion will be projected on to the second display.
New
Activate
7
8
iOS Screen Mirroring
Please connect your iOS Device to view or change settings.

MSI Center
for Business & Productivity
User
Balanced
Apps Optimizer ON
User Scenario
Application Optimizer
General Settings
Noise Cancellation
Duet Display
Screen Capture
Screen Profile
Hotkey Setting
monitor B
monitor A
MSI
Please connect to a second display.
After pressing the New button, dra
of the display you want to capture, and
will be projected on to the second displa
Do you want to switch between the captured and projected display?
Yes
No
8
Activate
9
iOS Screen Mirroring
Please connect your iOS Device to view or change settings.

How to use iOS Screen Mirroring

* This function is only available with iOS devices connected.

Before using this function, find and download [duet coach] from Apple App Store.

Duet Coach is capable to turn your iPad or iPhone into a high performance display to mirror your MSI PC. Once an iOS device is connected to the notebook, users will be able to interact to the notebook by using fingers or stylus through the iOS multi-touch display.

Please connect your iOS device to MSI notebook with an Apple Certified Charging Cable and activate MSI Center to get Duet Coach support. Follow the on-screen instructions to continue.

General Settings

Providing 3 quick switch in this page, includes Windows Key ON/OFF Switch, Windows or FN Keys selection Switch, and WebCam ON/OFF Switch.

Interface Overview

* Functions listed here may differ from models to models. Consult the local dealer for further information.

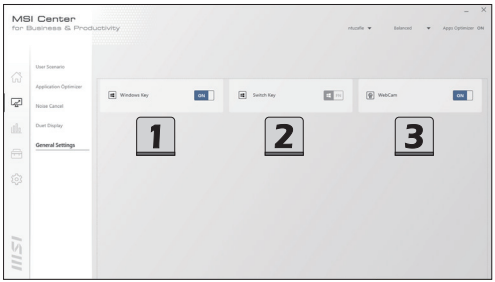

1. Windows Key ON/OFF Switch: Enable or disable Windows Key on the keyboard.
2. Windows /FN Keys Switch: Set the relative position of Windows and FN keys on the keyboard.
3. WebCam ON/OFF Switch: Enable or disable WebCam function

System Analysis

Within **System Analysis** category, there are 3 advanced functions included: System Info, Live Update and Microsoft APP.

System Info

Go to MSI Center [System Analysis > System Info].

1. System Info: Read-only system information provided here.
2. Export System Info: Export the current system information data to a .txt file.
3. Content Transfer: User this function when contacting MSI online customer service agents. Follow the instructions given by the online agent to continue.

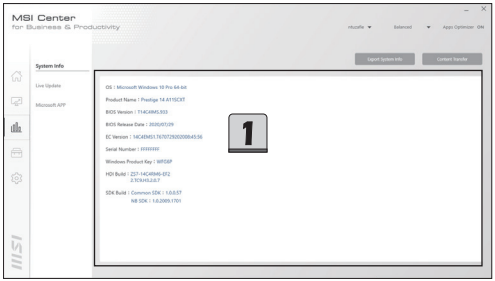

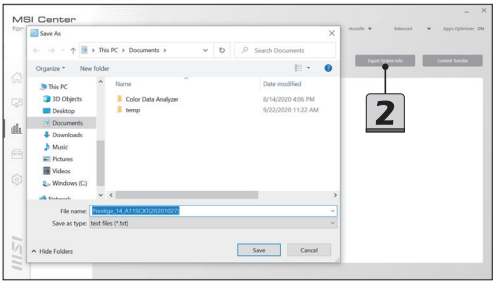

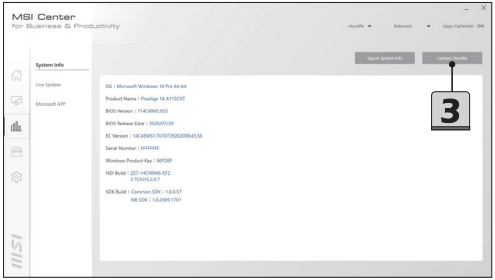
MSI Center
for Business & Productivity
System Info
Live Update
Microsoft APP
Export System Info
Content Transfer
OS : Microsoft Windows 10 Pro 64-bit
Product Name : Prestige 14 A11SCXT
BIOS Version : T14CAIMS.303
BIOS Release Date : 2020/07/29
EC Version : 14C4EMS1.T67072020200845:56
Serial Number : FFFFFFFF
Windows Product Key : WFDEP
HDI Build : Z27-14C4EMS-EF2
2.1074.9.0.0.7
SDK Build : Common SDK : 1.0.0.57
NB SDK : 1.0.2009.1701
3

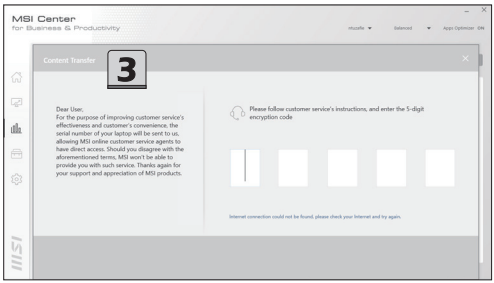
MSI Center
for Business & Productivity
Content Transfer
3
Dear User,
For the purpose of improving customer service's effectiveness and customer's convenience, the serial number of your laptop will be sent to us, allowing MSI online customer service agents to have direct access. Should you disagree with the aforementioned terms, MSI won't be able to provide you with such service. Thanks again for your support and appreciation of MSI products.
Please follow customer service's instructions, and enter the 5-digit encryption code
Internet connection could not be found, please check your Internet and try again.

Live Update

1. Connect to internet, and go to MSI Center [System Analysis > Live Update].
2. Move the mouse cursor to [Scan] icon, and click on it.
3. Live Update is capable to analyze the system automatically and give a list with every latest drivers and utilities available for updating.
4. Select a required driver or utility for updating, and then click [Download] to continue. Follow the on-screen instructions to complete the installation.
5. You may read the message [No internet connection. Please connect to the internet and retry], please check the internet connection.

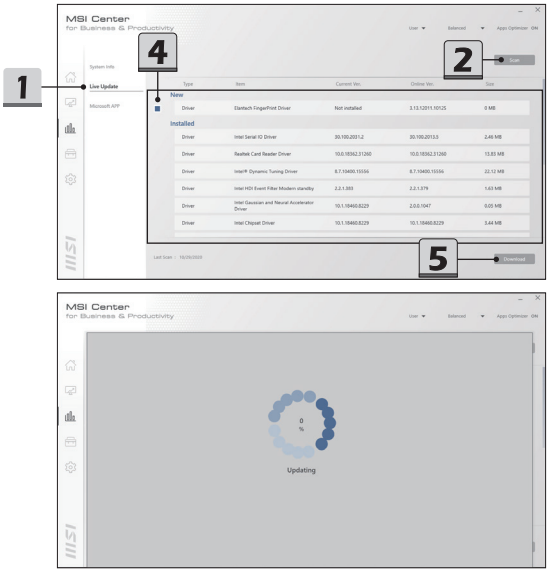

Microsoft APP

1. To use this function for the very first time, analyzing the system by Live Update is a must.
2. Connect to internet, go to MSI Center [System Analysis > Live Update], and click [Scan] icon.
3. Go to Micorsoft app now, users will get a list with compatible utilities.
4. Select a desired utility, and then click on the Micorsoft icon. Follow the on-Screen instructions to continue.

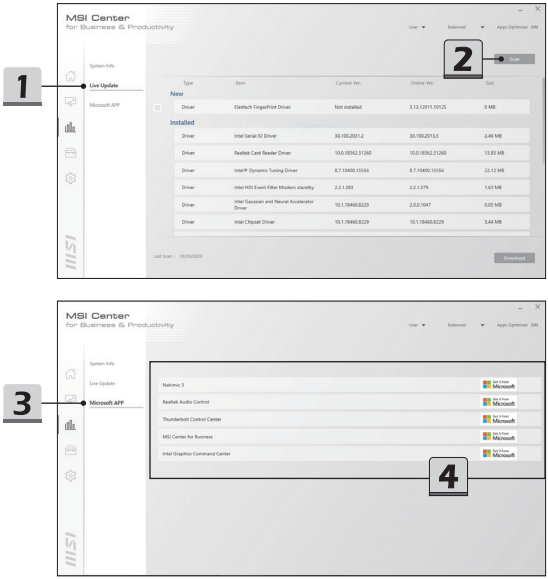

Support

Within **Support** category, there are 3 advanced functions included: System Diagnosis, Backup and System Restore.

System Diagnosis

System Diagnosis provides real-time battery and system status of the notebook. Use Battery Master to manage the battery with a wiser way; and use System Checker to analyze the storage and memory usage.

Battery Master

Go to MSI Center [Support > System Diagnostics] and find [Batter Master].

1. Users may distinguish the battery health status by the colors of the batter icon.
2. Select a suitable Battery modes for different usage.
   - AI Charger: automatically switch to the most suitable battery mode based on AI calculation.
   - Best for Mobility: Charge the battery to 100% at all time.
   - Balanced: Charge the battery when under 70%, and stop charging at 80%.
   - Best for Battery: Charge the battery when under 50%, and stop charging at 60%.

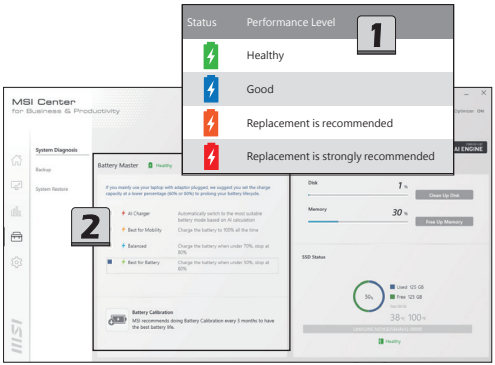

Battery Calibration

Go to MSI Center [Support > System Diagnostics] and find Battery Calibration under Batter Master. Click on the [Battery Calibration] icon.

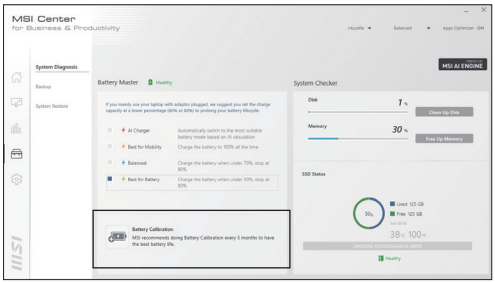

1. If you are using the Battery Calibration process for the very first time, at the [Status] field, there will be no information telling the date of last calibration.
2. Before starting the Battery Calibration process, it is required to check that the following conditions, a green signal will appear for each item if they meet the requirement:
   - The AC/DC adapter must be connected.
   - The battery must be installed properly.
   - No any other application is activated.
3. A red signal will appear, if any condition listed above does not meet the requirement.
4. Click on the [Start] icon to start the Battery Calibration process.
5. The calibration process status will be shown on the display telling users that the system is now charging, recharging, or discharging.
6. Calibration completed.
   MSI recommends doing Battery Calibration every 3 months to have the best battery life.
7. If the calibration process kept going failed, please replace the battery only with the same or equivalent type recommended by the manufacturer. Consult an authorized retailer or service center for further information and assistance.
8. If the AC/DC adapter is disconnected during the calibration process, a warning notification will appear. Please reconnect the AC/DC adapter to continue the calibration process within 15 seconds; otherwise the calibration process will stop automatically.

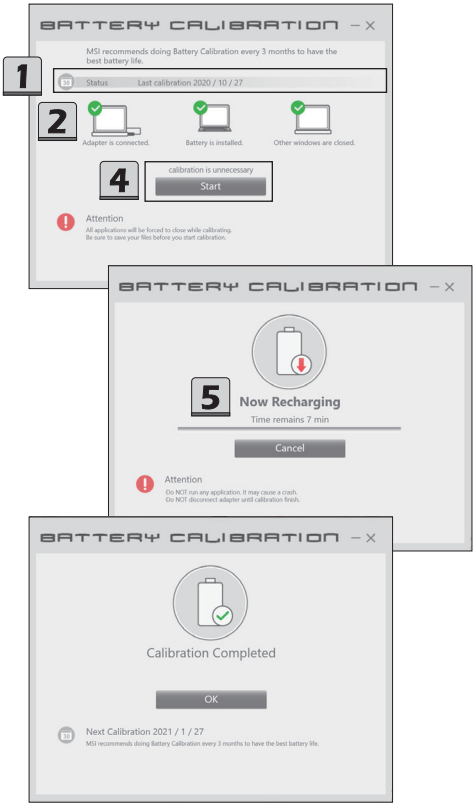
BATTERY CALIBRATION
MSI recommends doing Battery Calibration every 3 months to have the best battery life.
1
Status
Last calibration 2020 / 10 / 27
2
Adapter is connected.
Battery is installed.
Other windows are closed.
4
calibration is unnecessary
Start
Attention
All applications will be forced to close while calibrating.
Be sure to save your files before you start calibration.
BATTERY CALIBRATION
5
Now Recharging
Time remains 7 min
Cancel
Attention
Do NOT run any application. It may cause a crash.
Do NOT disconnect adapter until calibration finish.
BATTERY CALIBRATION
Calibration Completed
OK
Next Calibration 2021 / 1 / 27
MSI recommends doing Battery Calibration every 3 months to have the best battery life.

BATTERY CALIBRATION
7
Calibration Failed
OK
Attention
If you keep encounter problems on calibrating battery, your battery might be going bad/old.
Please consider replacing your battery.

BATTERY CALIBRATION
8
Adapter is disconnected!
Reconnect to continue or cancel the calibration.
Cancel (12)

System Checker

Go to MSI Center [Support > System Diagnostics] and find [System Checker]. Users may read the real-time status of the HDD and SSD storage and memory usage.

1. To clean up the disk, move the mouse cursor to [Clean Up Disk] and right click on it to bring the dialog window of [Disk Cleanup for Windows], and then follow the on-screen instructions to clean up the disk.
2. To free up the memory, simply move the mouse cursor to [Free Up Memory] and right click on it.

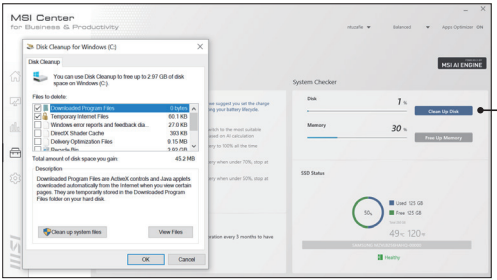
MSI Center
for Business & Productivity
Disk Cleanup for Windows (C:)
Disk Cleanup
You can use Disk Cleanup to free up to 2.97 GB of disk space on Windows (C:).
Files to delete:
Downloaded Program Files 0 bytes
Temporary Internet Files 60.1 KB
Windows error reports and feedback dia... 27.0 KB
DirectX Shader Cache 383 KB
Delivery Optimization Files 9.15 MB
Total amount of disk space you gain: 45.2 MB
Description
Downloaded Program Files are ActiveX controls and Java applets downloaded automatically from the Internet when you view certain pages. They are temporarily stored in the Downloaded Program Files folder on your hard disk.
Clean up system files
View Files
OK
Cancel
System Checker
Disk
1 %
Clean Up Disk
Memory
30 %
Free Up Memory
SSD Status
Used: 121 GB
Free: 125 GB
49
120
Healthy
1

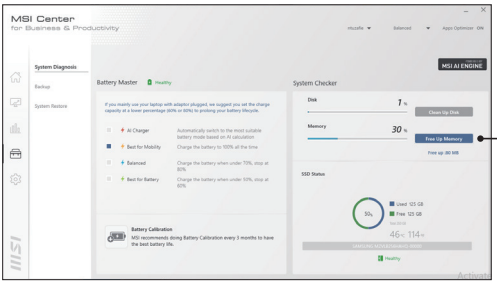

3. SSD status provides the information of SSD model, capacity, temperature, health status. Users may distinguish the SSD health status by the colors of the SSD icon.

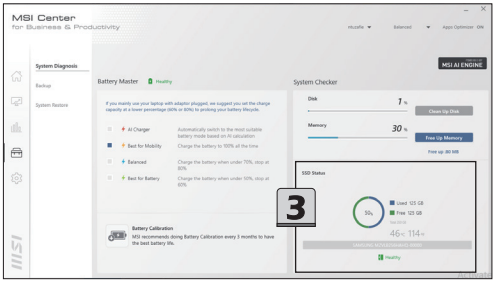

Status	Performance Level	3
	Healthy	
	Good	
	Replacement is recommended	
	Replacement is strongly recommended	

Backup

Users may be able to back up the recovery image to a USB flash disk or ISO files to recover the system back to the initial status of original manufacturer's default settings.

Be aware of backing up the important data to other storage devices before using this recovery function is a must.

Create a Recovery USB Flash Disk

1. To create a Recovery USB Flash Disk, select [USB], and then follow the on-screen instructions to continue.
2. Insert an USB flash disk with the capacity required.
3. Select the directory path of the inserted USB flash disk, and then select [Next] to continue.
4. Be noted that making an USB flash disk, the USB flash disk will be formated. Click [OK] to continue.
5. Follow the on-screen instruction to complete creating the Recovery USB Flash Disk.

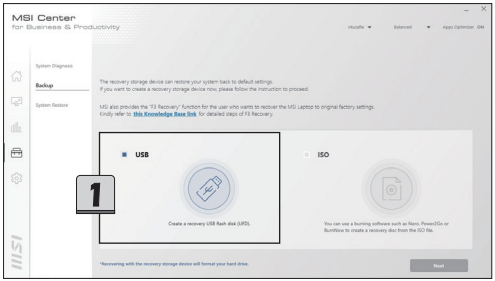
MSI Center
for Business & Productivity
System Diagnosis
Backup
System Restore
The recovery storage device can restore your system back to default settings.
If you want to create a recovery storage device now, please follow the instruction to proceed.
MSI also provides the "F3 Recovery" function for the user who wants to recover the MSI Laptop to original factory settings.
Kindly refer to this Knowledge Base link for detailed steps of F3 Recovery.
USB
ISO
1
Create a recovery USB flash disk (UFD).
You can use a burning software such as Nero, Power2Go or
BurnNow to create a recovery duct from the ISO file.
*Recovering with the recovery storage device will format your hard drive.
Next

MSI Center
for Business & Productivity
System Diagnosis
Backup
System Restore
Please insert a USB flash disk to build recovery UFD. The capacity of the selected UFD must be larger than 32 GB.
Select USB flash drive then click Next button to continue.
USB Flash Drive Name
Capacity
2
Warning: If you click the Next button, all files in your selected disk will be cleared.
Back
Next
MSI Center
for Business & Productivity
Warning
The action will format your USB flash drive. Are you sure to continue?
4
OK
NO
MSI Center
for Business & Productivity
5
Create Successfully
The ISO file or UFD has been created successfully.

Create a Recovery ISO File

1. To create a Recovery ISO file, select [ISO], and then follow the on-screen instructions to continue.
2. Select the directory path of where the ISO file will be saved, and then select [Next] to continue.
3. Recovery ISO file created and saved successfully.
4. This ISO file can be used to make a recovery disk with a burning software.

MSI Center
for Business & Productivity
System Diagnosis
Backup
System Restore
The recovery storage device can restore your system back to default settings.
If you want to create a recovery storage device now, please follow the instruction to proceed.
MSI also provides the "F3 Recovery" function for the user who wants to recover the MSI Laptop to original factory settings.
Kindly refer to this Knowledge Base link for detailed steps of F3 Recovery.
1
USB
ISO
Create a recovery USB flash disk (UFD).
You can use a burning software such as Nero, Power2Go or
BurnNow to create a recovery disc from the ISO file.
*Recovering with the recovery storage device will format your hard drive.
Next

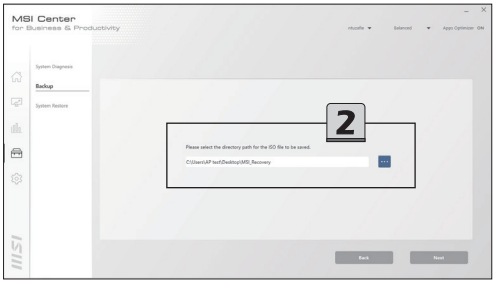

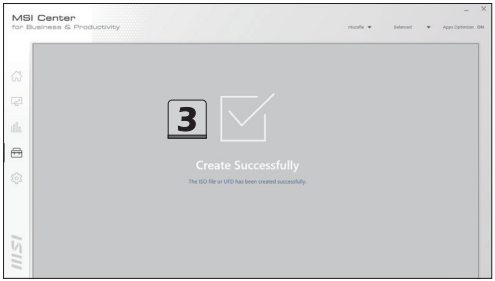

Recovering the System

When the hard drive and system encountered non-recoverable problems, it is always recommended to perform the System Recovery Function with F3 Hotkey first.

If the system is unable to recover to the factory default settings with F3 Hotkey, proceed the recovery function with the DVD recovery disk or USB flash drive.

1. Insert the DVD recovery disk or USB flash drive to your computer.
2. Restart the computer.
3. Press the [F11] hotkey on the keyboard while the computer is re-booting.
4. Select to boot from DVD Recovery disk or USB flash drive, and then follow the on-screen instructions to continue.
5. The main page of Recover System appears.
6. Select [System Partition Recovery] to reset the hard disk drive partition where the operating system installed to the factory default settings.
7. Select [Hard Disk Recovery] to restore the hard disk to the factory default settings.
8. AC power is required while proceeding the System Recovery Function. Assure that the AC power is connected to the notebook before moving forward to the next step.
9. The system recovery process will format the hard disk drive; make sure that the important data has been backed up before continuing the process.
10. Follow the on-screen instructions to continue.

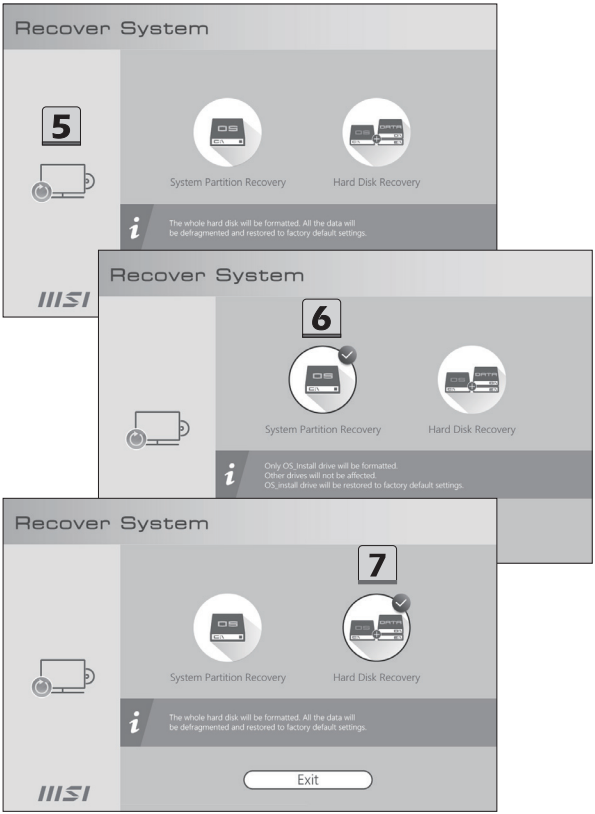
Recover System
5
System Partition Recovery
Hard Disk Recovery
The whole hard disk will be formatted. All the data will be defragmented and restored to factory default settings.
Recover System
6
System Partition Recovery
Hard Disk Recovery
Only OS_Install drive will be formatted.
Other drives will not be affected.
OS_install drive will be restored to factory default settings.
Recover System
7
System Partition Recovery
Hard Disk Recovery
The whole hard disk will be formatted. All the data will be defragmented and restored to factory default settings.
Exit

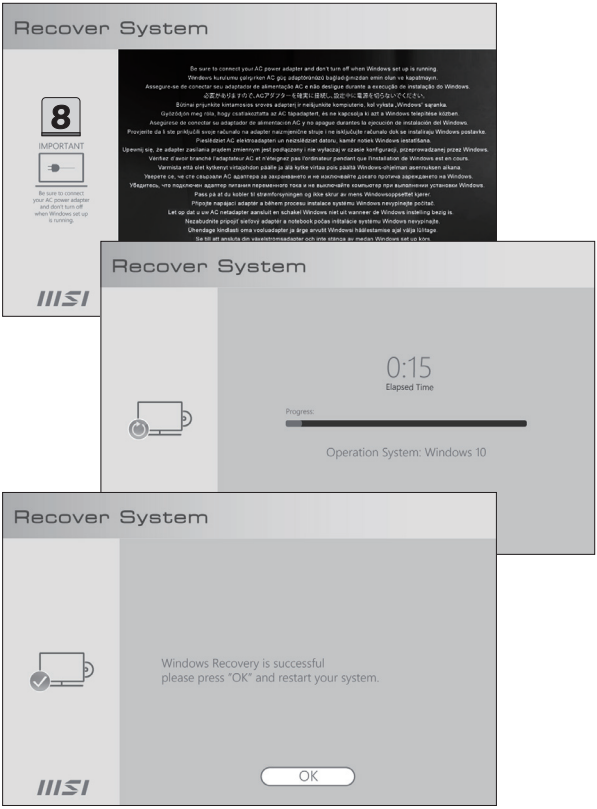
Recover System
8
IMPORTANT
Be sure to connect your AC power adapter and don't turn off when Windows set up is running.
Be sure to connect your AC power adapter and don't turn off when Windows set up is running.
Windows kurulumu çalışırken AC güç adaptörünüzü bağladığınızdan emin olun ve kapatmayın.
Assegure-se de conectar seu adaptador de alimentação AC e não desligue durante a execução da instalação do Windows.
Varmista että sytkeytyt virtadroon pääte ja älä kytke virtaa pois päältä Windows-ohjelmien asennuksen aikana.
Уверете се, че сте свързали AC адаптера за захранването и не изключвайте докато програма зареждането на Windows.
Pass på at du kobler til strømforsyningen og ikke skrur av mens Windowsoppsettet kjører.
Let op dat u uw AC-netadapter aansluit en schakel Windows niet uit wanneer de Windows installeg bezig is.
Nezakončete připojit vašiny adaptér a notebook počas inštalácie systému Windows nevypínajte.
Se till att ansluta din växelströmsadapter och inte stänga av medan Windows set up körs.
Recover System
0:15
Elapsed Time
Progress:
Operation System: Windows 10
Recover System
Windows Recovery is successful
please press "OK" and restart your system.
OK

System Restore

System Restore helps users to manage system restore points. Users are allowed to undo system changes by reverting the system to a previous restore point.

Interface Overview

1. Go to MSI Center [Support > System Restore].
2. ON/OFF Switch: switch ON/OFF to enable/disable the system protection function.
3. Restore Point List: show all the restore points created by system from time to time.
4. Create Restore Point: click to create your own restore point.
5. Open Windows Setting: click to use the System Restore function provided by Windows.

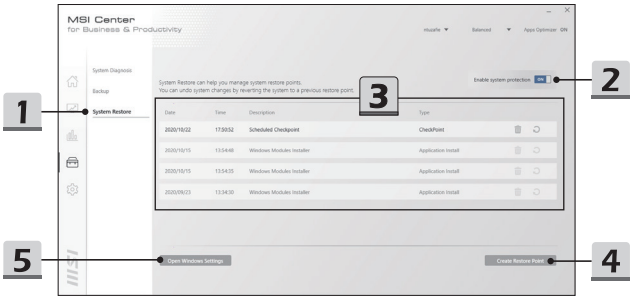

How to restore the system to a selected Restore Point

1. Choose a restore point from the Restore Point List.
2. Click on the [Restore] icon, and then click [Restore] to continue.
3. System Restore Successfully.

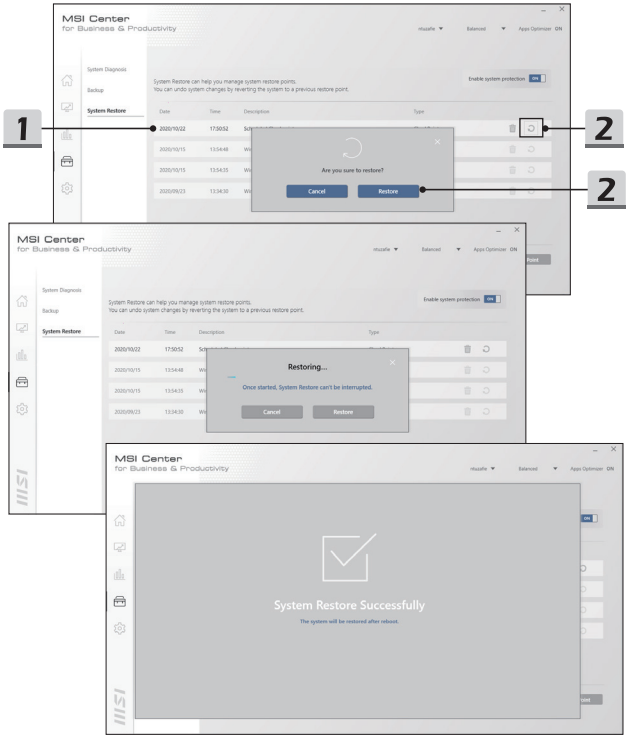

How to create your own Restore Point

1. Click on the [Create Restore Point] to bring out the [System Restore Point] dialog window.
2. Give a description for the restore point within the dialog box, and then click [Create] to continue.
3. Restore point created Successfully, and find the new restore point created within the Restore Point List.
4. To delete a restore point from the list, simply move the mouse cursor to the [trashcan] icon and click on it. Then follow the on-screen instructions to continue.

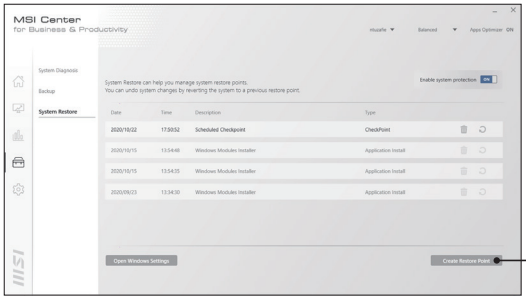

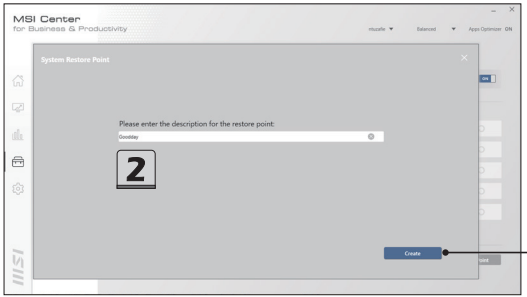

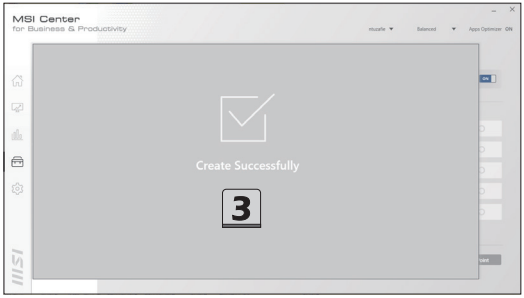
MSI Center
for Business & Productivity
Create Successfully
3

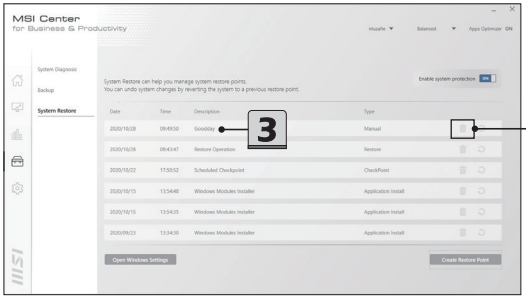
MSI Center
for Business & Productivity
System Diagnosis
Backup
System Restore
System Restore can help you manage system restore points.
You can undo system changes by reverting the system to a previous restore point.
Enable system protection
Date
Time
Description
Type
2020/10/28 09:49:50 Goodday Manual
2020/10/28 09:43:47 Restore Operation Restore
2020/10/22 17:50:52 Scheduled Checkpoint CheckPoint
2020/10/15 13:54:48 Windows Modules Installer Application Install
2020/10/15 13:54:35 Windows Modules Installer Application Install
2020/09/23 13:34:30 Windows Modules Installer Application Install
Open Windows Settings
Create Restore Point
3
4

System Restore function provided by Windows

1. Click on the [Open Windows Setting] to bring out the [System Properties] dialog window provided by Windows OS.
2. Select the tag of [System Protection], and then follow the on-screen instructions to continue.

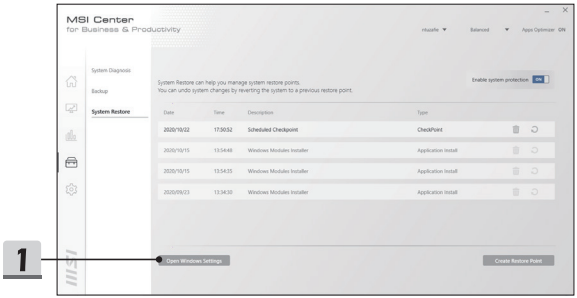

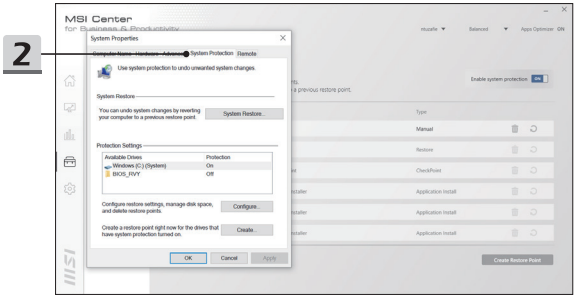

Setting

Within **Setting** category, users are allowed to make settings by using the ON/OFF switch. Follow the on-screen instructions to continue.

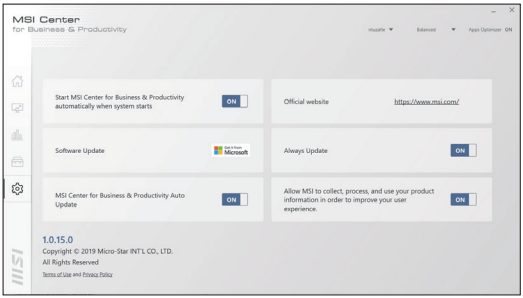
MSI Center
for Business & Productivity
Start MSI Center for Business & Productivity automatically when system starts
ON
Official website
https://www.msi.com/
Software Update
Get it from Microsoft
Always Update
ON
MSI Center for Business & Productivity Auto Update
ON
Allow MSI to collect, process, and use your product information in order to improve your user experience.
ON
1.0.15.0
Copyright © 2019 Micro-Star INT'L CO., LTD.
All Rights Reserved
Terms of Use and Privacy Policy

MSI.COM

MSI
GLOBAL YOUTUBE

MSI
INSTAGRAM